

The Sling chair comes packaged in a cardboard box - folded in half to maximise shipping costs




Hanging gear for standard applications included:

- rawl expansion bolt for concrete ceiling (M 10),
- rope for around beam,
- rope to attach from hanging point to chair,
- spring for a soft gentle sitting experience
- swivel to be enable you to turn the Sling to face any direction



Take chair out of box carefully.
Fold one half circle tube over to form circle but it will still be two halves

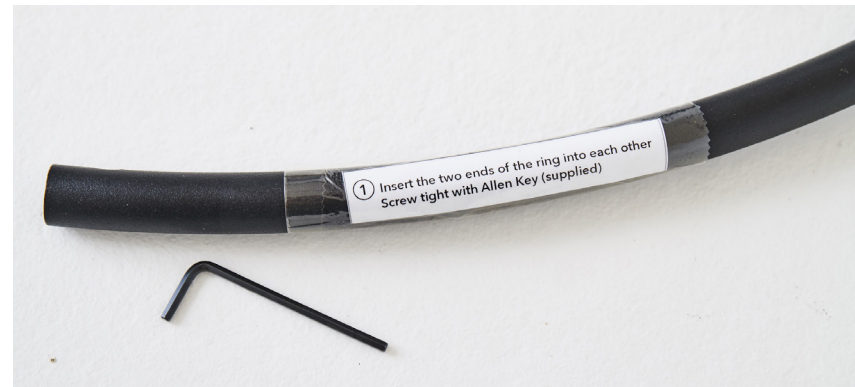

An Allen key spanner is supplied.



Loosen screws.



Attach the two halves to each other.
- the front side and the back side and fasten screws

Very important - the leather and ropes will now be scew/sideways on the chair - they are in the wrong place.
The leather has to be moved over so the the middle of the leather is over the join of the tube.
Push the leather over the small half circle ring and ropes (over where the ropes are attached on the ring spacer).
Refer to the instructions on the chair to show you in which direction to pull. Do the one side then the other side.



**The join is now here, in the middle,
under the leather**

TOP: where the ropes
are closer together.

TOP: where the ropes
are closer together.

BOTTOM: where the
ropes are wider apart

**The join is now here, in the middle
under the leather**

BOTTOM: where the
ropes are wider apart





VERY IMPORTANT


Please undo the tape
LAST just before
hanging your chair.

Once untied - please
keep holding up.

This will avoid the ropes
getting tangled




**This is
showing a
beam
- refer to next
page for
concrete
ceiling**

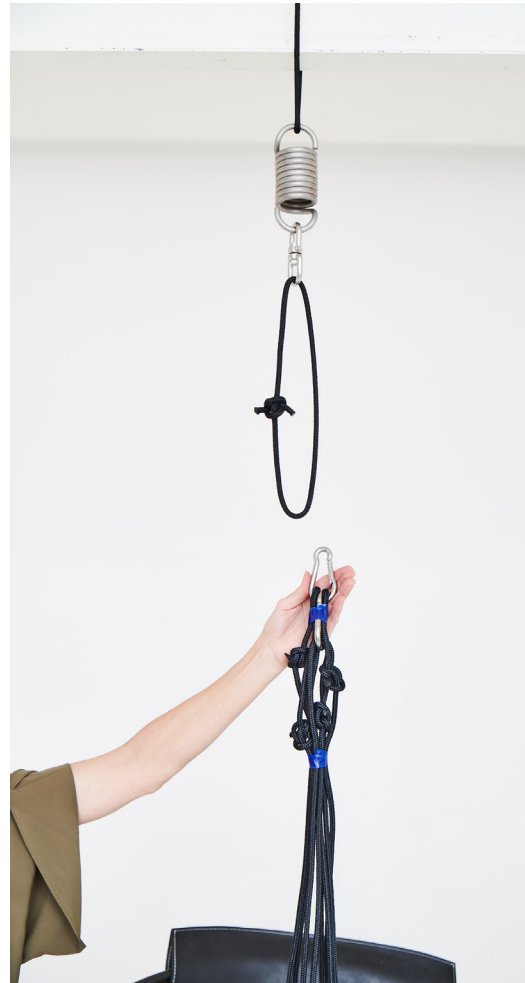

Clip carbiner onto rope


**LEAVE THE TAPE
or cable ties on
- and/or keep hold-
ing the carabiners
up - so the ropes
don't get tangled**

**- do your height
adjustments and
only then remove
the tape**

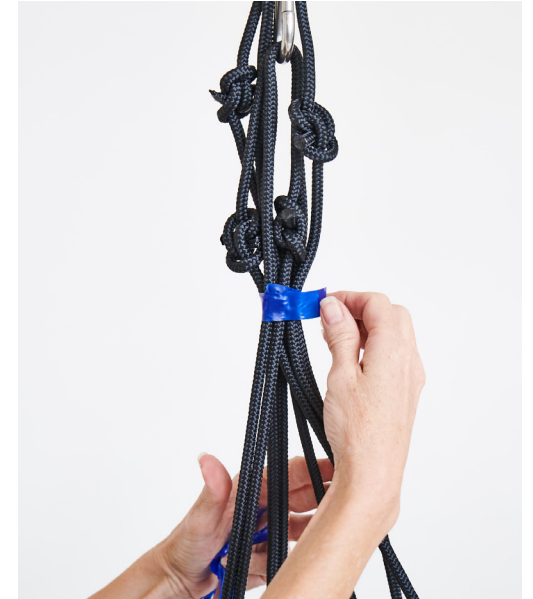

undo tape or cable ties

CONCRETE
CEILING

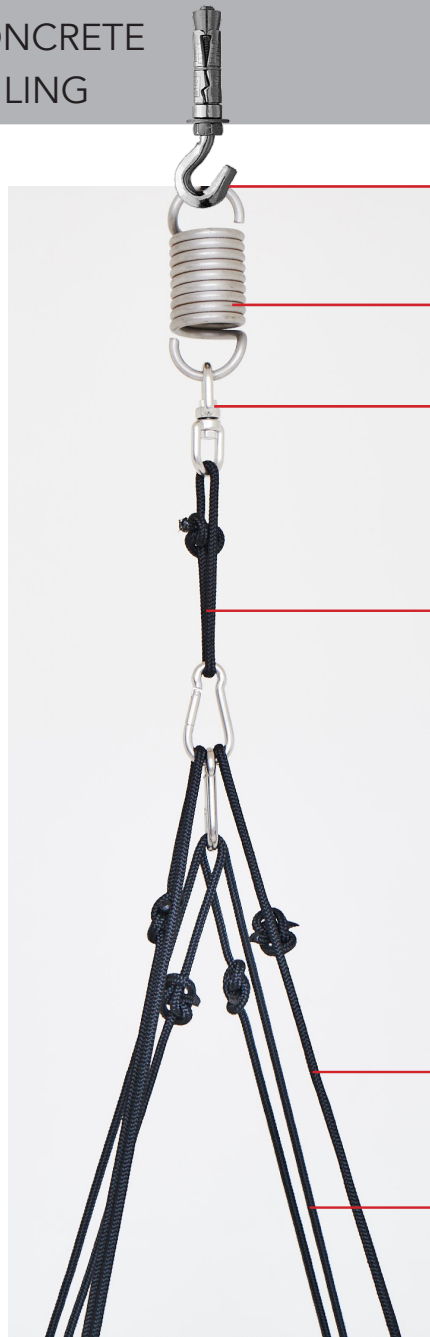

Rawl hook expanding bolt

Spring

Swivel

- to ensure that chair can face in any direction
- 360 degrees

This rope can be adjusted to suit
the ceiling height / hanging point height
This can be any length.

Ropes from front of chair (where your legs are)
must go in the TOP Carabiner.


Note - insert rope then bottom carabiner then 2nd rope
(* it comes packed like this - we make it up already like this
for shipping)

Ropes from back of chair (where your
head is)
must go in the BOTTOM Carabiner

BEAM

Rope



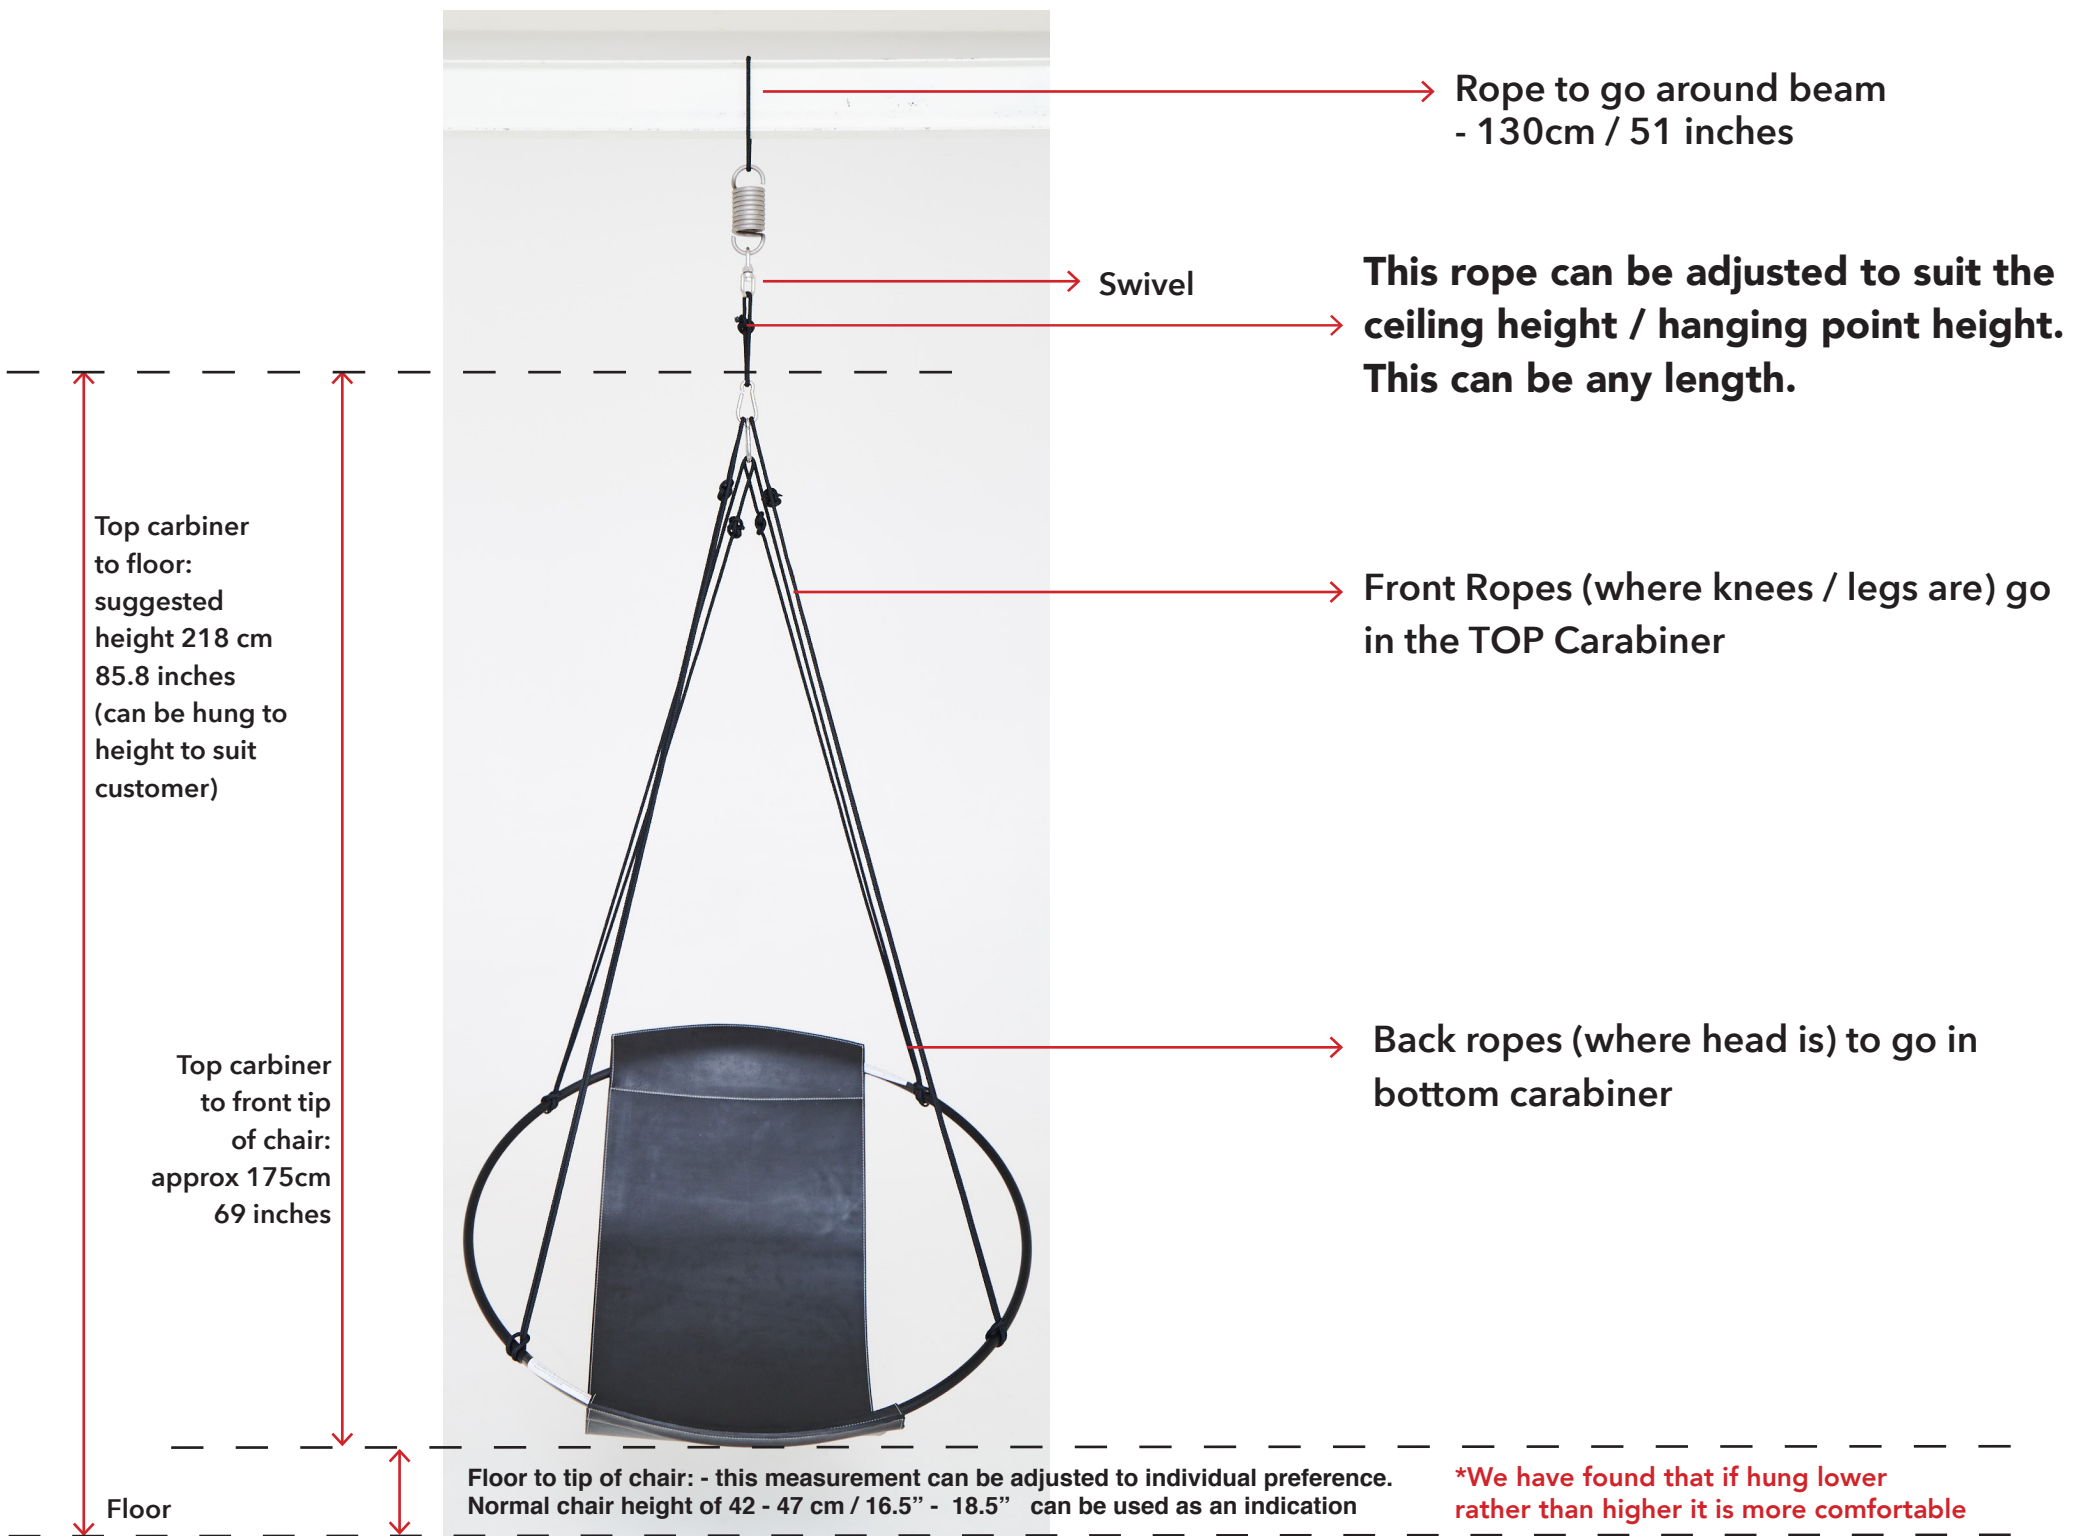

Just in case - A closer look at how the ropes go onto the carabiners



→ **Front Ropes (where knees / legs are) go in the TOP carabiner**

→ **Back ropes (where head is) to go in bottom carabiner**



There are no rules:
You can put the spring at the top at the
hanging point - and out of the way
and not so visual
BUT
you can also put the spring
with the carabiners

Hang your bolster up! The weights will keep it in place and prevent it from slipping down.



Enjoy!

